



General Description

Polyfet's GAN (on SiC) HEMT power transistors contain no internal matching; making them suitable for both broadband and narrow band applications. The use of a thermally enhanced package enables this device to have superior heat dissipation properties. The high drain break down voltage permits this device to operate over a wide voltage range.



RF POWER GAN TRANSISTOR

40.0 Watts Single Ended

Package Style GP

HIGH EFFICIENCY, LINEAR

HIGH GAIN, LOW NOISE

ROHS COMPLIANT

Suitable for use across 1-3000Mhz

ABSOLUTE MAXIMUM RATINGS (T = 25 °C)

Total Device Dissipation	Junction to Case Thermal Resistance	Maximum Junction Temperature	Storage Temperature	Drain to Source Voltage	Gate to Source Voltage
75 Watts	4.20 °C/W	200 °C	-65 °C to 150 °C	180 V	-10 V to + 2 V

RF CHARACTERISTICS (40.0 WATTS OUTPUT)


SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Gps	Common Source Power Gain	11			dB	Idq = 0.15 A, Vds = 48.0 V, F = 2,500 MHz
η	Drain Efficiency		55		%	Idq = 0.15 A, Vds = 48.0 V, F = 2,500 MHz
VSWR	Load Mismatch Tolerance			10:1	Relative	Idq = 0.15 A, Vds = 48.0 V, F = 2,500 MHz

ELECTRICAL CHARACTERISTICS (EACH SIDE)

SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Bvdss	Drain Breakdown Voltage	250			V	Ids = 7.50mA, Vgs = -8V
Idsat	Saturation Current		6.80		Amp	Vgs = +2V, Vds = 10V
Idss	Zero Bias Drain Current			2.0	mA	Vds = 48.0 V, Vgs = -8V
Vgs	Gate Bias for Drain Current		-2.5		V	Vds = 48.0 V Ids = 0.15A
Ciss	Common Source Input Capacitance		7.2		pF	Vds = 48.0 Vgs = -8V, F = 1 MHz
Crss	Common Source Feedback Capacitance		0.37		pF	Vds = 48.0 Vgs = -8V, F = 1 MHz
Coss	Common Source Output Capacitance		3.5		pF	Vds = 48.0 Vgs = -8V, F = 1 MHz

GP2441

POUT VS PIN GRAPH

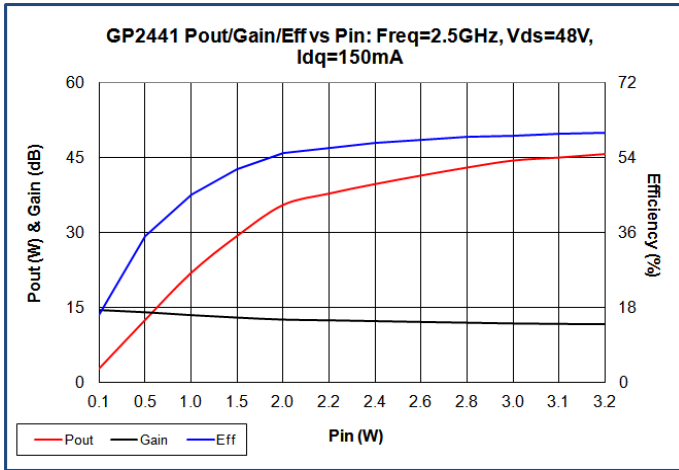

BROADBAND PERFORMANCE

BROADBAND PERFORMANCE

BROADBAND PERFORMANCE

BROADBAND PERFORMANCE

PACKAGE DIMENSIONS IN INCHES

