




General Description

Silicon VDMOS and LDMOS transistors designed specifically for broadband RF applications. Suitable for Military Radios, Cellular and Paging Amplifier Base Stations, Broadcast FM/AM, MRI, Laser Driver and others.

"Polyfet"™ process features low feedback and output capacitances, resulting in high F_t transistors with high input impedance and high efficiency.

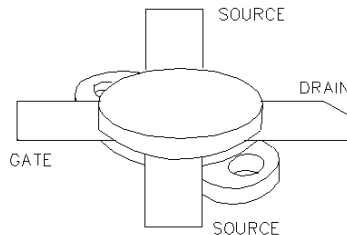

SILICON GATE ENHANCEMENT MODE

RF POWER VDMOS TRANSISTOR

150.0 Watts Single Ended

Package Style AM

**HIGH EFFICIENCY, LINEAR
HIGH GAIN, LOW NOISE**

ABSOLUTE MAXIMUM RATINGS (T = 25 °C)

| Total Device Dissipation | Junction to Case Thermal Resistance | Maximum Junction Temperature | Storage Temperature | DC Drain Current | Drain to Gate Voltage | Drain to Source Voltage | Gate to Source Voltage |
|--------------------------|-------------------------------------|------------------------------|---------------------|------------------|-----------------------|-------------------------|------------------------|
| 300 Watts | 0.55 °C/W | 200 °C | -65 °C to 150 °C | 15.0 A | 125 V | 125 V | 20 V |

RF CHARACTERISTICS (150.0 WATTS OUTPUT)


| SYMBOL | PARAMETER | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
|--------|--------------------------|-----|-----|-----|----------|---|
| Gps | Common Source Power Gain | 13 | | | dB | Idq = 0.80 A, Vds = 50.0 V, F = 175 MHz |
| η | Drain Efficiency | | 65 | | % | Idq = 0.80 A, Vds = 50.0 V, F = 175 MHz |
| VSWR | Load Mismatch Tolerance | | | 5:1 | Relative | Idq = 0.80 A, Vds = 50.0 V, F = 175 MHz |

ELECTRICAL CHARACTERISTICS (EACH SIDE)


| SYMBOL | PARAMETER | MIN | TYP | MAX | UNITS | TEST CONDITIONS |
|--------|------------------------------------|-----|-------|-----|-------|--------------------------------|
| Bvdss | Drain Breakdown Voltage | 125 | | | V | Ids = 40.00 mA, Vgs = 0V |
| Idss | Zero Bias Drain Current | | | 5.0 | mA | Vds = 50.0 V, Vgs = 0V |
| Igss | Gate Leakage Current | | | 1 | uA | Vds = 0V Vgs = 30V |
| Vgs | Gate Bias for Drain Current | 1 | | 7 | V | Ids = 0.30 A, Vgs = Vds |
| gM | Forward Transconductance | | 5.5 | | Mho | Vds = 10V, Vgs = 5V |
| Rdson | Saturation Resistance | | 0.30 | | Ohm | Vgs = 20V, Ids = 6.00 A |
| Idsat | Saturation Current | | 35.00 | | Amp | Vgs = 20V, Vds = 10V |
| Ciss | Common Source Input Capacitance | | 400.0 | | pF | Vds = 50.0 Vgs = 0V, F = 1 MHz |
| Crss | Common Source Feedback Capacitance | | 15.0 | | pF | Vds = 50.0 Vgs = 0V, F = 1 MHz |
| Coss | Common Source Output Capacitance | | 200.0 | | pF | Vds = 50.0 Vgs = 0V, F = 1 MHz |

SM341


POUT VS PIN GRAPH

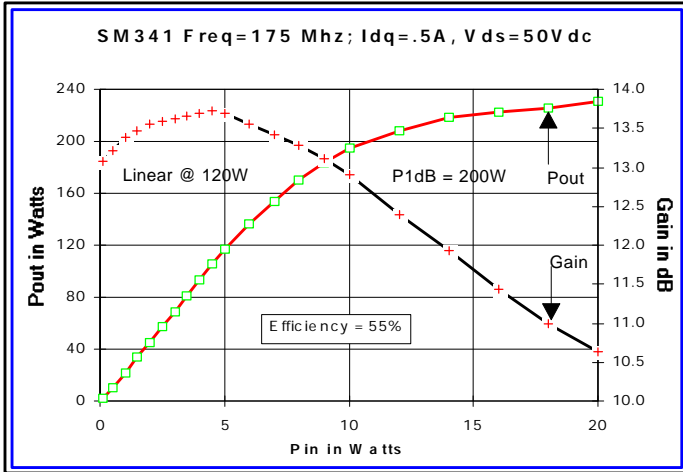


IV CURVE

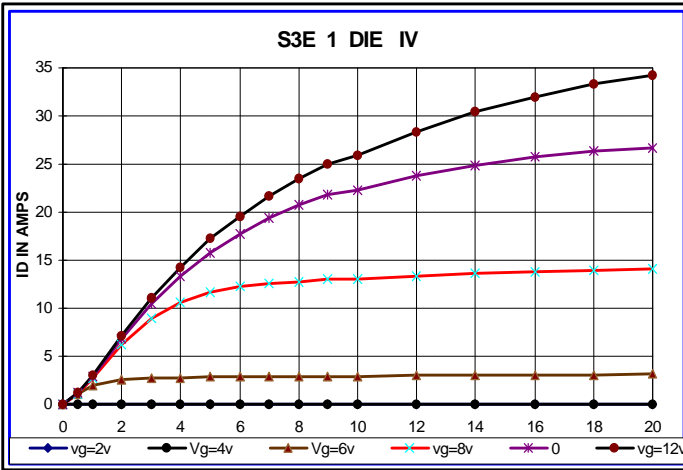


Zin Zout

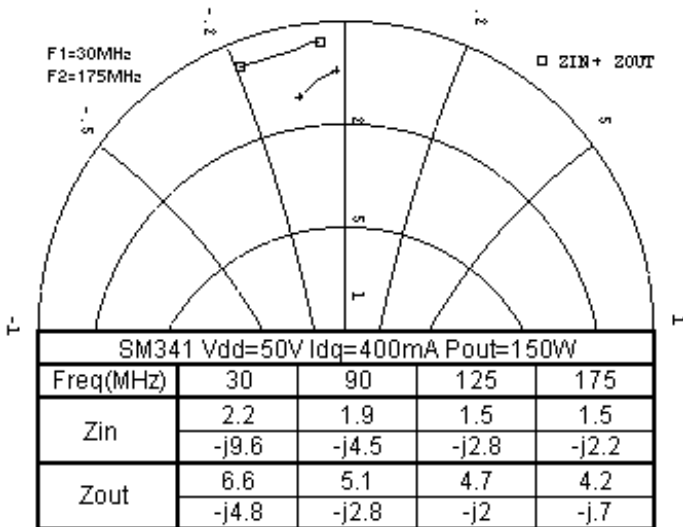

CAPACITANCE VS VOLTAGE

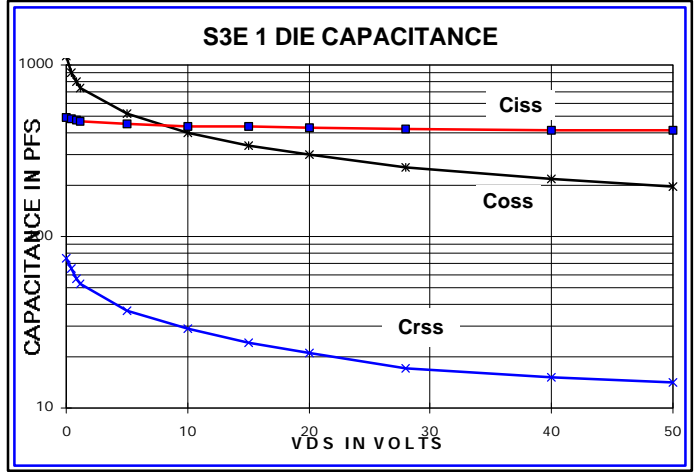

ID & GM VS VGS

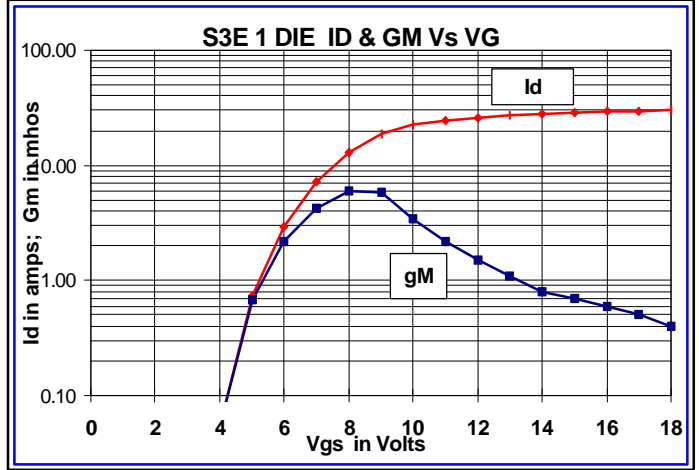

PACKAGE DIMENSIONS IN INCHES

