




**General Description**

Silicon VDMOS and LDMOS transistors designed specifically for broadband RF applications. Suitable for Military Radios, Cellular and Paging Amplifier Base Stations, Broadcast FM/AM, MRI, Laser Driver and others.

"Polyfet"™ process features gold metal for greatly extended lifetime. Low output capacitance and high  $F_t$  enhance broadband performance

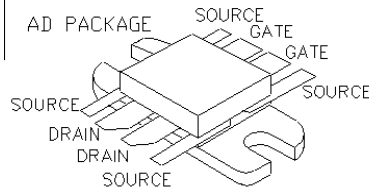

**PATENTED GOLD METALIZED SILICON GATE ENHANCEMENT MODE RF POWER VDMOS TRANSISTOR**

**80 Watts Push - Pull**

**Package Style AD**

**HIGH EFFICIENCY, LINEAR, HIGH GAIN, LOW NOISE**

**ABSOLUTE MAXIMUM RATINGS (TC = 25 °C)**

Total Device Dissipation	Junction to Case Thermal Resistance	Maximum Junction Temperature	Storage Temperature	DC Drain Current	Drain to Gate Voltage	Drain to Source Voltage	Gate to Source Voltage
290 Watts	0.6 °C/W	200 °C	-65 °C to 150 °C	12 A	70 V	70V	30V

**RF CHARACTERISTICS ( 80WATTS OUTPUT )**


SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Gps	Common Source Power Gain	10			dB	$I_{dq} = 1.2 A, V_{ds} = 28.0V, F = 500 MHz$
$\eta$	Drain Efficiency		60		%	$I_{dq} = 1.2 A, V_{ds} = 28.0V, F = 500 MHz$
VSWR	Load Mismatch Tolerance			20:1	Relative	$I_{dq} = 1.2 A, V_{ds} = 28.0V, F = 500 MHz$

**ELECTRICAL CHARACTERISTICS (EACH SIDE)**


SYMBOL	PARAMETER	MIN	TYP	MAX	UNITS	TEST CONDITIONS
Bvdss	Drain Breakdown Voltage	65			V	$I_{ds} = 0.15 A, V_{gs} = 0V$
Idss	Zero Bias Drain Current			3	mA	$V_{ds} = 28.0 V, V_{gs} = 0V$
Igss	Gate Leakage Current			1	uA	$V_{ds} = 0 V, V_{gs} = 30V$
Vgs	Gate Bias for Drain Current	1		7	V	$I_{ds} = 0.3 A, V_{gs} = V_{ds}$
gM	Forward Transconductance		2.4		Mho	$V_{ds} = 10V, V_{gs} = 5V$
Rdson	Saturation Resistance		0.5		Ohm	$V_{gs} = 20V, I_{ds} = 12A$
Idsat	Saturation Current		16.5		Amp	$V_{gs} = 20V, V_{ds} = 10V$
Ciss	Common Source Input Capacitance		99		pF	$V_{ds} = 28.0 V, V_{gs} = 0V, F = 1 MHz$
Crss	Common Source Feedback Capacitance		12		pF	$V_{ds} = 28.0 V, V_{gs} = 0V, F = 1 MHz$
Coss	Common Source Output Capacitance		60		pF	$V_{ds} = 28.0 V, V_{gs} = 0V, F = 1 MHz$

# F1018


POUT VS PIN GRAPH

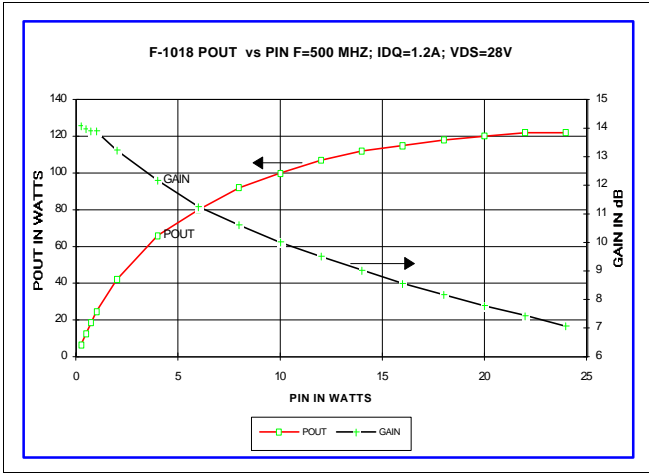


IV CURVE

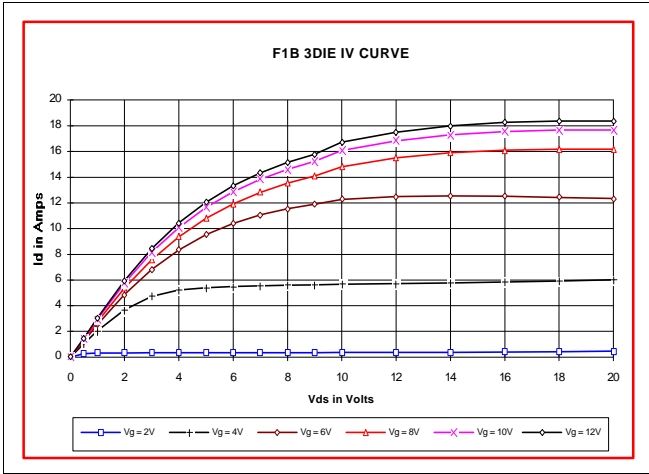


S11 AND S22 SMITH CHART

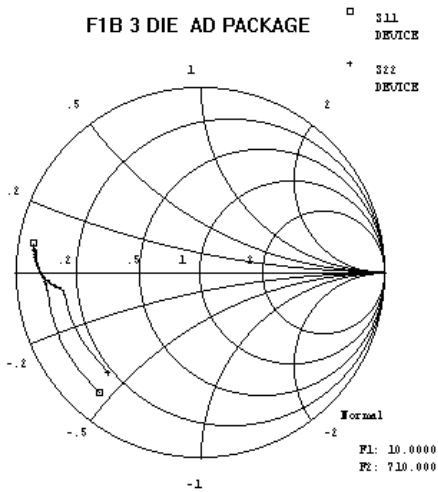

CAPACITANCE VS VOLTAGE

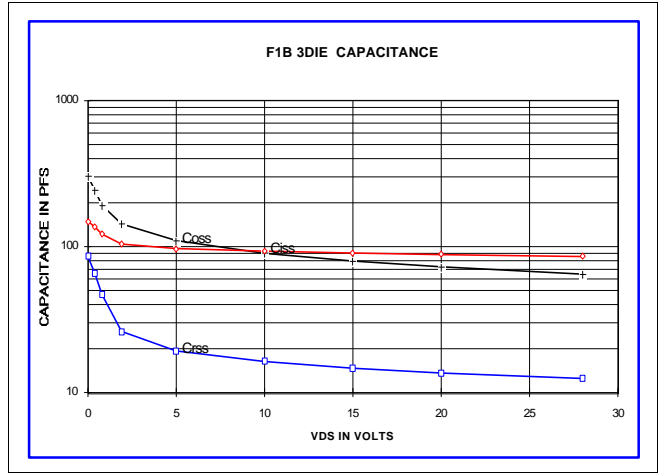

ID AND GM VS VGS

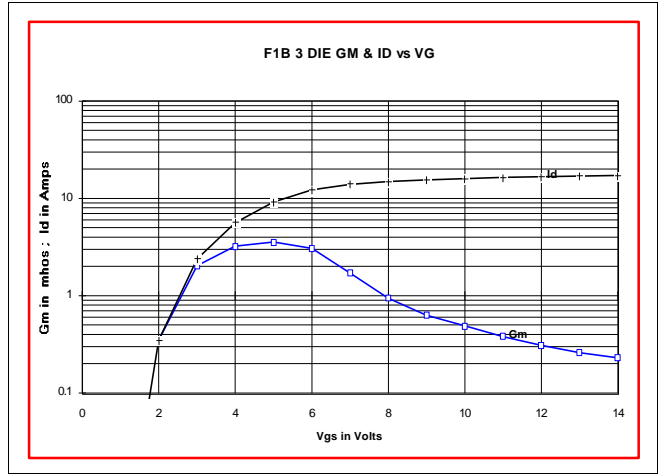

PACKAGE DIMENSIONS IN INCHES

